




# Centine reticolari a 4 correnti

# belloli



## Caratteristiche:

- Peso contenuto → facili da montare
- Materiale: acciaio d'armatura B500B
- Tensione a snervamento ( $f_y$ ) > 500 N/mm<sup>2</sup>
- Tensione a rottura ( $f_r$ ) > 550 N/mm<sup>2</sup>

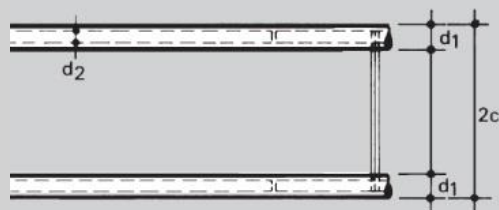

Tipo	Valori statici						Dimensioni dei profili				
	Peso [kg/m]	$A_s$ [mm <sup>2</sup> ]	$I_y$ [mm <sup>4</sup> x 10 <sup>6</sup> ]	$W_y$ [mm <sup>3</sup> x 10 <sup>3</sup> ]	$I_z$ [mm <sup>4</sup> x 10 <sup>6</sup> ]	$W_z$ [mm <sup>3</sup> x 10 <sup>3</sup> ]	$d_1$ [mm]	$d_2$ [mm]	$h$ [mm]	$2c$ [mm]	$h_1$ [mm]
4G-100/18	10.9	1020	3.571	52.52	2.179	36.62	18	10	136	110	100
4G-100/20	12.8	1256	4.553	65.04	2.689	48.02	20	10	140	112	100
4G-100/22	14.8	1520	5.702	79.19	3.262	57.23	22	10	144	114	100
4G-100/26	19.6	2124	8.520	112.10	4.584	77.69	26	10	152	118	100
4G-100/30	25.2	2828	12.108	151.34	6.143	100.70	30	10	160	122	100
4G-100/34	31.6	3632	16.566	19.721	7.948	126.15	34	12	168	126	100
4G-100/40	44.1	5040	25.200	280.00	11.169	169.22	40	12	180	132	100
4G-140/18	11.4	1020	6.387	72.57	4.464	59.51	18	10	176	150	140
4G-140/20	13.3	1256	8.070	89.66	5.503	72.40	20	10	180	152	140
4G-140/22	15.2	1520	10.019	108.89	6.667	86.58	22	10	184	154	140
4G-140/26	20.1	2124	14.722	153.35	9.342	118.25	26	10	192	158	140
4G-140/30	25.6	2828	20.592	205.91	12.478	154.04	30	10	200	162	140
4G-140/34	32.2	3632	27.753	266.85	16.083	193.77	34	12	208	166	140
4G-140/40	44.9	5040	41328	375.70	22.458	261.14	40	12	220	172	140
4G-180/18	12.3	1020	10.018	92.75	5.912	69.55	18	10	216	170	180
4G-180/20	14.2	1256	12.592	114.46	7.286	84.72	20	10	220	172	180
4G-180/22	16.3	1520	15.550	138.85	8.826	101.44	22	10	224	174	180
4G-180/26	21.1	2124	22.623	195.02	12.358	138.85	26	10	232	178	180
4G-180/30	26.6	2828	31.338	261.14	16.494	181.25	30	10	240	182	180
4G-180/34	33.2	3632	41.845	337.46	21.241	228.39	34	12	248	186	180
4G-180/40	45.7	5040	61.488	472.98	29.615	308.49	40	12	260	192	180
4G-220/18	14.8	1020	14.465	113.00	7.565	79.62	18	12	256	190	220
4G-220/20	16.7	1256	18.118	139.36	9.314	97.01	20	12	260	192	220
4G-220/22	18.8	1520	22.300	168.94	11.291	116.40	22	12	164	194	220
4G-220/26	23.5	2124	32.224	236.93	15.799	159.58	26	12	272	198	220
4G-220/30	29.1	2828	44.347	316.76	21.075	208.66	30	12	280	202	220
4G-220/34	37.3	3632	58.843	408.63	27.125	263.34	34	12	288	206	220
4G-220/40	49.8	5040	85.680	571.20	37.780	356.41	40	12	300	212	220

Altre dimensioni disponibili su richiesta